


WMCC FULL CANTILEVERED JIB CRANE SPECIFICATIONS

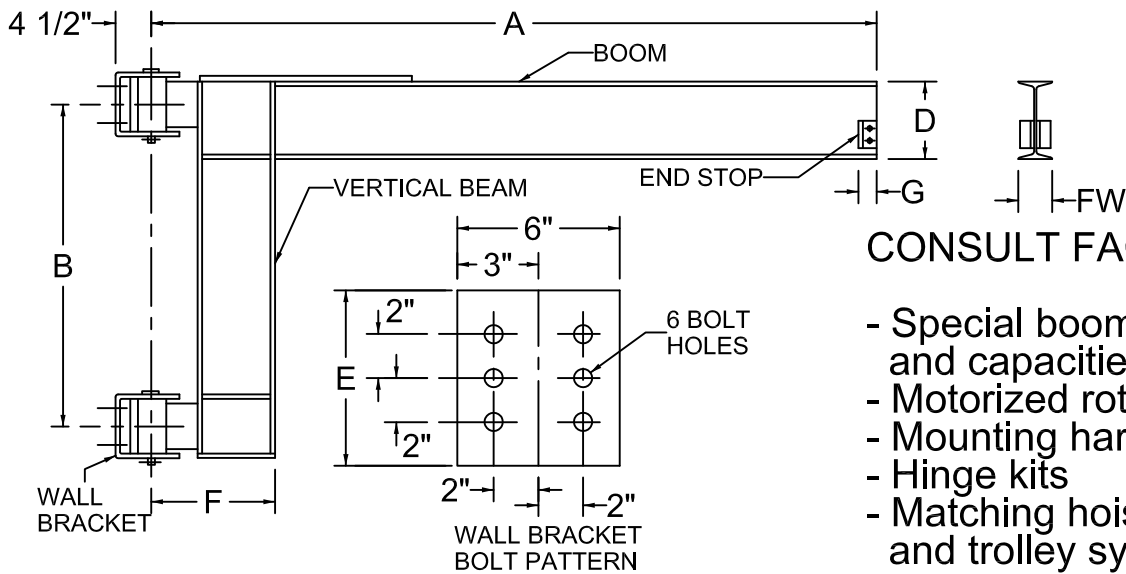

CONSULT FACTORY FOR:

- Special boom lengths and capacities
- Motorized rotation
- Mounting hardware
- Hinge kits
- Matching hoist and trolley systems

MODEL NO.	CAPACITY	A	B	D	FW	E	F	G	BOLT HOLE DIA.	THRUST & PULL (LBS.)	WEIGHT (LBS.)
WMCC508	500 LB.	8'	3'	6"	3 3/8"	7"	10"	2"	9/16"	1881	205
WMCC510	500 LB.	10'	3'	6"	3 3/8"	7"	10"	2"	9/16"	2393	230
WMCC512	500 LB.	12'	4'	6"	3 3/8"	7"	12"	2"	9/16"	2201	304
WMCC514	500 LB.	14'	4'	6"	3 3/8"	7"	12"	2"	9/16"	2610	329
WMCC516	500 LB.	16'	4'	8"	4"	7"	12"	2"	9/16"	3227	442
WMCC518	500 LB.	18'	4'	8"	4"	7"	12"	2"	9/16"	3712	479
WMCC520	500 LB.	20'	4'	10-3/8"	5-3/4" WF	7"	16-3/8"	3"	9/16"	4623	747
WMCC108	1000 LB.	8'	3'	8"	4"	7"	12"	2"	9/16"	3680	277
WMCC110	1000 LB.	10'	3'	8"	4"	7"	12"	2"	9/16"	4662	314
WMCC112	1000 LB.	12'	3'	8"	4"	7"	12"	2"	9/16"	5668	350
WMCC114	1000 LB.	14'	4'	8"	4"	7"	16-3/8"	2"	9/16"	5046	482
WMCC116	1000 LB.	16'	4'	10-3/8"	5-3/4" WF	7"	16-3/8"	3"	9/16"	6089	644
WMCC118	1000 LB.	18'	4'	10-3/8"	5-3/4" WF	7"	16-3/8"	3"	9/16"	6965	696
WMCC120	1000 LB.	20'	6'	12-3/8"	6-1/2" WF	7"	16-3/8"	3"	9/16"	5394	875
WMCC208	2000 LB.	8'	4'	8"	4"	7"	16-3/8"	2"	9/16"	5368	371
WMCC210	2000 LB.	10'	5'	10-3/8"	5-3/4" WF	8"	16-3/8"	3"	11/16"	5490	527
WMCC212	2000 LB.	12'	5'	10-3/8"	5-3/4" WF	8"	16-3/8"	3"	11/16"	6649	579
WMCC214	2000 LB.	14'	5'	10-3/8"	5-3/4" WF	8"	16-3/8"	3"	11/16"	7828	631
WMCC216	2000 LB.	16'	6'	12-3/8"	6-1/2" WF	8"	16-3/8"	3"	11/16"	7618	765
WMCC218	2000 LB.	18'	6'	16"	7" WF	8"	16"	3"	11/16"	8949	1083
WMCC220	2000 LB.	20'	6'	16"	7" WF	8"	16"	3"	11/16"	10074	1163
WMCC408	4000 LB.	8'	4'	12-3/8"	6-1/2" WF	8"	16-3/8"	3"	11/16"	10639	469
WMCC410	4000 LB.	10'	4'	12-3/8"	6-1/2" WF	8"	16-3/8"	3"	11/16"	13379	529
WMCC412	4000 LB.	12'	4'	12-3/8"	6-1/2" WF	8"	16-3/8"	3"	11/16"	16150	589
WMCC414	4000 LB.	14'	5'	16"	7" WF	8"	16"	3"	11/16"	15384	887
WMCC416	4000 LB.	16'	6'	21"	6-1/2" WF	8"	16"	3"	11/16"	15142	1256
WMCC418	4000 LB.	18'	6'	21"	6-1/2" WF	8"	18"	3"	11/16"	17224	1465
* WMCC420	4000 LB.	20'	7'-6"	23 3/4"	7" WF	8"	18"	3"	11/16"	15611	1840
WMCC608	6000 LB.	8'	4'	16"	7" WF	8"	18"	3"	11/16"	15928	679
WMCC610	6000 LB.	10'	4'	16"	7" WF	8"	18"	3"	11/16"	20016	759
WMCC612	6000 LB.	12'	6'	16"	7" WF	8"	22"	3"	11/16"	16127	974
WMCC614	6000 LB.	14'	6'	16"	7" WF	8"	22"	3"	11/16"	18906	1054
WMCC616	6000 LB.	16'	6'-6"	21"	6-1/2" WF	8"	22"	3"	11/16"	20391	1402
* WMCC618	6000 LB.	18'	7'-6"	23 3/4"	7" WF	8"	22"	3"	11/16"	20138	1743
* WMCC620	6000 LB.	20'	9'-6"	23 3/4"	7" WF	8"	22-1/2"	3"	13/16"	17836	2135

WF INDICATES THAT THIS JIB CRANE USES A WIDE-FLANGE BEAM. THE TROLLEY USED ON THIS CRANE MUST BE DESIGNED TO OPERATE ON A WIDE-FLANGE BEAM.

* THESE CRANES SHIP IN TWO PIECES AND HAVE BOLT ON BOOMS.

DESIGN LOAD IS BASED ON THE JIB CAPACITY PLUS HOIST AND TROLLEY ALLOWANCE (15% OF CAPACITY) AND IMPACT ALLOWANCE (15% OF CAPACITY).



1377 Kimberly Drive
Neenah, WI 54956-1642
Phone (920) 722-0101
Fax (920) 725-1394
www.contrx.com